

Job Name:		Location:	
Purchaser:		Submitted By:	
Submitted To:		Engineer:	
Date:		Application:	

Reference Approval Construction



Basic product info.

IDU Model Number	PVA-AA24NL
IDU Model Code	32P102
ODU Model Number	PUZ-AK24NLHZ
AHRI Certificate	215712200

Performance: Cooling at 95F (35C)

Cooling 95F Maximum Capacity	25000	Btu/h
Cooling 95F Rated Capacity	24000	Btu/h
Cooling 95F Minimum Capacity	13600	Btu/h
Cooling Maximum Power Input	1830	W
Cooling Rated Power Input	1760	W
Cooling Minimum Power Input	800	W
Moisture removal at AHRI Cooling Rating Conditions	6.7	Pints/h
Sensible Heat Factor at AHRI Cooling Rating Conditions	0.7	-

Performance: Heating at 47F (8.3C)

Heating 47F Maximum Capacity	28000	Btu/h
Heating 47F Rated Capacity	26000	Btu/h
Heating 47F Minimum Capacity	12800	Btu/h
Heating 47F Maximum Power Input	2020	W
Heating 47F Rated Power Input	1860	W
Heating 47F Minimum Power Input	720	W
COP 47F at Rated Condition	4	

Performance: Heating at 17F (-8.3C)

Heating 17F Maximum Capacity	26000	Btu/h
Heating 17F Rated Capacity	17000	Btu/h
Heating 17F Minimum Capacity	7000	Btu/h
Heating 17F Maximum Power Input	3750	W
Heating 17F Rated Power Input	2000	W
Heating 17F Minimum Power Input	940	W
COP 17F at Maximum capacity	2	
COP 17F at Rated Condition	2.4	

Performance: Heating at 5F (-15C)

Heating 5F Maximum Capacity (H4Full)	26000	Btu/h
Heating 5F Rated Capacity (H4Full)	16700	Btu/h
Heating 5F Minimum Capacity (H4Full)	7000	Btu/h
Heating 5F Maximum Power Input (H4Full)	3480	W
Heating 5F Rated Power Input (H4Full)	2000	W
Heating 5F Minimum Power Input (H4Full)	1040	W
COP 5F at Maximum capacity (H4Full)	2.1	

Performance: Heating at -13F (-25C)

COP -13F at Maximum Capacity	1.9	
Heating -13F Maximum Capacity	18500	Btu/h
Heating -13F Minimum Capacity	4600	Btu/h
Heating -13F Maximum Power Input	2850	W
Heating -13F Minimum Power Input	940	W

ODU Operating Temp. Range

Heating Thermal Re-start Temp	-13 / -25	F° / C°
Heating Thermal Lock-out Temp	-22 / -30	F° / C°
Heating Thermal Re-start Temp (F)	-13 / -25	F° / C°
Heating Thermal Lock-out Temp (F)	-22 / -30	F° / C°

Rebates

Energy Star 6.1 Certified	Yes	
Energy Star 6.1 Cold Climate Certified	Yes	
NEEP Certification	Yes	

Efficiency

SEER2	19.7	
EER2	13.6	
HSPF2 (IV)	8.8	
HSPF2 (V)	7.2	

Electrical

Rated Voltage (Min)	208	V AC
Rated Voltage (Max)	230	V AC
Phase	1	
Short-circuit Current Rating (SCCR)	5	kA
Recommended Fuse/Breaker Size	25	A
ODU Minimum Circuit Ampacity (MCA)	24	A
ODU Maximum Over Current Protection (MOCP) = MOP = Maximum Fuse	39	A

Indoor Unit

IDU Airflow Rate at Heating 1	613	CFM
IDU Airflow Rate at Heating 2	744	CFM
IDU Airflow Rate at Heating 3	875	CFM
IDU Unit Dimension W	21.0625	inch
IDU Unit Dimension D	21.625	inch
IDU Unit Dimension H	54.3125	inch
IDU Unit Weight	141	lbs
IDU Airflow Rate at Cooling, Dry 1	613	CFM
IDU Airflow Rate at Cooling, Dry 2	744	CFM
IDU Airflow Rate at Cooling, Dry 3	875	CFM

Outdoor Unit

ODU Fan Motor Output	0.0992 + 0.0992	HP
Base Pan Heater installed (Built-in or Optional)	Built-in	
ODU Unit Dimension W	41.375	inch
ODU Unit Dimension D	14	inch
ODU Unit Dimension H	52.6875	inch
ODU Unit Weight	231.4851	lbs

Piping

Gas Pipe Size O.D. [Flared]	5/8	inch
Liquid Pipe Size O.D. [Flared]	3/8	inch
Maximum Height Difference	98.4252	ft
Maximum Piping Length	164.042	ft

Refrigerant

Refrigerant Type	R454B	
Pre-charged Refrigerant Amount	158.733	oz
Maximum Pre-charged Piping Length	98.4252	ft

Accessories

Wall Mount controller	PAR-42MAACAB	
Simple Wall MA Controller	PAC-YT53CRAU-J	
Simple CN105 Controller	PAC-SDW01	
NA T-STAT Interface	RMF-CA100	
Wi-Fi Adapter	PAC-USWHS002	


AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) (* Windscreens required for cooling operations below 23°F (-5°C))

- ¹ Cooling (Indoor // Outdoor) 80°F (26.6°C) DB, 67°F (19.4°C) WB // 95°F (35°C) DB, 75°F (23.9°C) WB
- ² Heating at 47°F (8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 47°F (8.3°C) DB, 43°F (6.1°C) WB
- ³ Heating at 17°F (-8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 17°F (-8.3°C) DB, 15°F (-9.4°C) WB
- tHeating at 5°F (-15°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 5°F (-15°C) DB, 4°F (-15.6°C) WB
- uHeating at -4°F (-20°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // -4°F (-20°C) DB, -15°F (-26.1°C) WB

PVA-AA24NL

Units: mm (in.)

Model code	A	B	C	D	E	F	G	H	J	Gas Pipe	Liquid Pipe
12	432 (17.1)	316 (12.43/16)	281 (11.1/8)	224 (8.8/8)	1275 (50.1/4)	686 (26.99/16)	823 (32.7/16)	735.5 (29)	360 (14.3/16)	Ø 21.7 (1/2)	Ø 15.3 (1/4)
18	514 (20.1)	417 (16.39/16)	382.6 (15.1/8)	286.5 (11.0/1/2)	1316 (51.4)	731 (29.1/16)	933.5 (37.1/16)	792 (31.3/16)	461 (18.5/16)		
30	635 (25.1)	519 (20.43/16)	484.6 (19.1/8)	311.5 (12.2/1/2)	1511 (59.1/2)	798.5 (31.7/16)	1053 (41.1/2)	853.5 (33.5/8)	583 (22.9/16)		
42											
48											

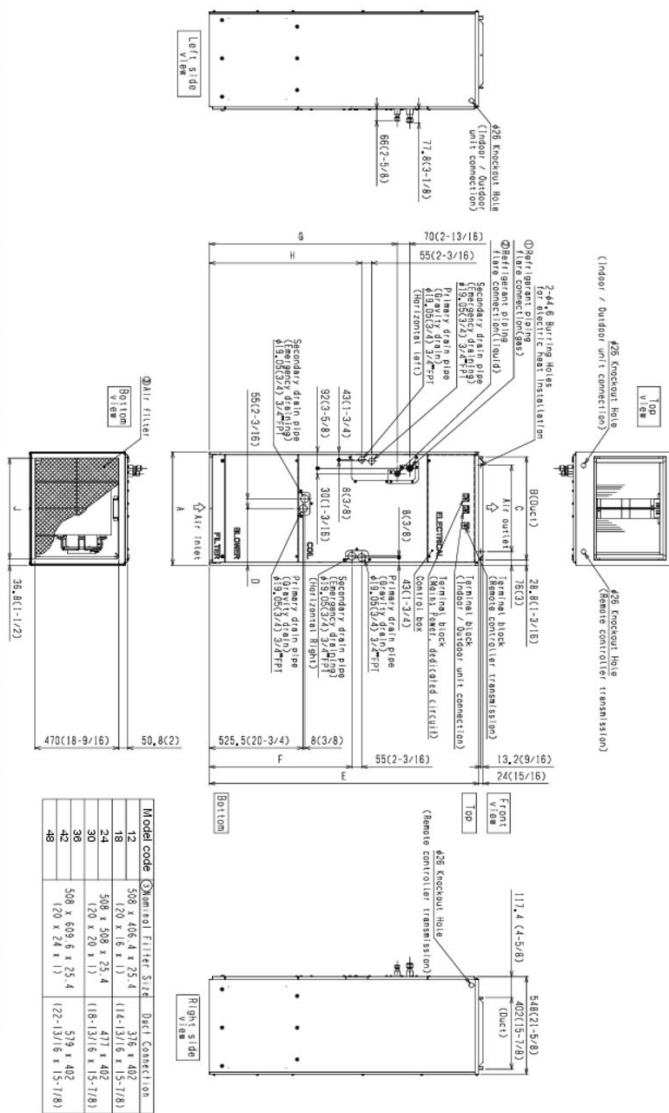

Provide enough clearance in front of unit for service and maintenance. Electrical entrance for PVA located on both left and right side of the cabinet. See the right or left side view for knockout locations.

