

Job Name:	
Purchaser:	
Submitted To:	
Date:	

Location:	
Submitted By:	
Engineer:	
Application:	

Reference    Approval    Construction



**Basic product info.**

ODU Model Number	MXZ-2D20NL
AHRI Certification (Multi Non-ducted)	216498925
AHRI Certification (Multi Mixed)	216505923
AHRI Certification (Multi Ducted)	216505922
NEEP Certified (Multi Non-ducted)	Yes
NEEP Certified (Multi Mixed)	Yes
NEEP Certified (Multi Ducted)	Yes

**Performance: Cooling at 95F (35C)**

Cooling 95F Maximum Capacity (Multi Non-ducted)	20000
Cooling 95F Maximum Capacity (Multi Mixed)	21000
Cooling 95F Maximum Capacity (Multi Ducted)	22000
Cooling 95F Rated Capacity (Multi Non-ducted)	18000
Cooling 95F Rated Capacity (Multi Mixed)	19000
Cooling 95F Rated Capacity (Multi Ducted)	20000
Cooling 95F Minimum Capacity (Multi Non-ducted)	5700
Cooling 95F Minimum Capacity (Multi Mixed)	5700
Cooling 95F Minimum Capacity (Multi Ducted)	5700
Cooling Maximum Power Input (Multi Non-ducted)	2245
Cooling Maximum Power Input (Multi Mixed)	2258
Cooling Maximum Power Input (Multi Ducted)	2270
Cooling Rated Power Input (Multi Non-ducted)	1384
Cooling Rated Power Input (Multi Mixed)	1692
Cooling Rated Power Input (Multi Ducted)	2000

**Performance: Heating at 47F (8.3C)**

Heating 47F Maximum Capacity (Multi Non-ducted)	25700
Heating 47F Maximum Capacity (Multi Mixed)	25750
Heating 47F Maximum Capacity (Multi Ducted)	25800
Heating 47F Rated Capacity (Multi Non-ducted)	22000
Heating 47F Rated Capacity (Multi Mixed)	22000
Heating 47F Rated Capacity (Multi Ducted)	22000
Heating 47F Minimum Capacity (Multi Non-ducted)	7400
Heating 47F Minimum Capacity (Multi Mixed)	7400
Heating 47F Minimum Capacity (Multi Ducted)	7400
Heating 47F Maximum Power Input (Multi Non-ducted)	2465
Heating 47F Maximum Power Input (Multi Mixed)	2497.5
Heating 47F Maximum Power Input (Multi Ducted)	2530
Heating 47F Rated Power Input (Multi Non-ducted)	1641
Heating 47F Rated Power Input (Multi Mixed)	1706
Heating 47F Rated Power Input (Multi Ducted)	1771
COP 47F at Rated Condition (Multi Non-ducted)	3.92
COP 47F at Rated Condition (Multi Mixed)	3.76
COP 47F at Rated Condition (Multi Ducted)	3.64

**Performance: Heating at 17F (-8.3C)**

Heating 17F Maximum Capacity (Multi Non-ducted)	16600	
Heating 17F Maximum Capacity (Multi Mixed)	16200	
Heating 17F Maximum Capacity (Multi Ducted)	15800	
Heating 17F Rated Capacity (Multi Non-ducted)	16500	
Heating 17F Rated Capacity (Multi Mixed)	15000	
Heating 17F Rated Capacity (Multi Ducted)	13500	
Heating 17F Maximum Power Input (Multi Non-ducted)	1860	
Heating 17F Maximum Power Input (Multi Mixed)	1910	
Heating 17F Maximum Power Input (Multi Ducted)	1960	
Heating 17F Rated Power Input (Multi Non-ducted)	1690	
Heating 17F Rated Power Input (Multi Mixed)	1590	
Heating 17F Rated Power Input (Multi Ducted)	1490	
COP 17F at Maximum capacity (Multi Non-ducted)	2.6	
COP 17F at Maximum capacity (Multi Mixed)	2.48	
COP 17F at Maximum capacity (Multi Ducted)	2.36	
COP 17F at Rated Condition (Multi Non-ducted)	2.86	
COP 17F at Rated Condition (Multi Mixed)	2.76	
COP 17F at Rated Condition (Multi Ducted)	2.64	

**Performance: Heating at 5F (-15C)**

Heating 5F Maximum Capacity (Multi Non-ducted) (H4Full)	13700	
Heating 5F Maximum Capacity (Multi Mixed) (H4Full)	12750	
Heating 5F Maximum Capacity (Multi Ducted) (H4Full)	11800	
Heating 5F Rated Capacity (Multi Non-ducted) (H4Full)	13700	
Heating 5F Rated Capacity (Multi Mixed) (H4Full)	12700	
Heating 5F Rated Capacity (Multi Ducted) (H4Full)	11800	
Heating 5F Maximum Power Input (Multi Non-ducted) (H4Full)	1800	
Heating 5F Maximum Power Input (Multi Mixed) (H4Full)	1815	
Heating 5F Maximum Power Input (Multi Ducted) (H4Full)	1830	
Heating 5F Rated Power Input (Multi Non-ducted) (H4Full)	1800	
Heating 5F Rated Power Input (Multi Mixed) (H4Full)	1815	
Heating 5F Rated Power Input (Multi Ducted) (H4Full)	1830	
COP 5F at Maximum capacity (Multi Non-ducted) (H4Full)	2.22	
COP 5F at Maximum capacity (Multi Mixed) (H4Full)	2.04	
COP 5F at Maximum capacity (Multi Ducted) (H4Full)	1.88	

**ODU Operating Temp. Range**

Cooling Thermal Re-start Temp	14	
Cooling Thermal Lock-out Temp	10	
Heating Thermal Re-start Temp	5	
Heating Thermal Lock-out Temp	-4	

**Rebates**

Energy Star 6.1 Certified (Multi Non-ducted)	Yes	
Energy Star 6.1 Certified (Multi Mixed)	Yes	
Energy Star 6.1 Certified (Multi Ducted)	No	
Energy Star 6.1 Cold Climate Certified (Multi Non-ducted)	No	
Energy Star 6.1 Cold Climate Certified (Multi Mixed)	No	
Energy Star 6.1 Cold Climate Certified (Multi Ducted)	No	

**Efficiency**

SEER2 (Multi Non-ducted)	20	
SEER2 (Multi Mixed)	18	
SEER2 (Multi Ducted)	16	
EER2 (Multi Non-ducted)	13	
EER2 (Multi Mixed)	11.5	
EER2 (Multi Ducted)	10	
HSPF2 (V) (Multi Non-ducted)	8.4	
HSPF2 (V) (Multi Mixed)	7.95	
HSPF2 (V) (Multi Ducted)	7.5	

**Electrical**

ODU Minimum Circuit Ampacity (MCA)	21.7	
ODU Maximum Over Current Protection (MOCP) = MOP = Maximum Fuse	30	

**Outdoor Unit**

Base Pan Heater installed (Built-in or Optional)	Optional	
--	----------	--

**Piping**

Gas Pipe A Size O.D. [Flared]	3/8	
Liquid Pipe A Size O.D. [Flared]	1/4	
Gas Pipe B Size O.D. [Flared]	3/8	
Liquid Pipe B Size O.D. [Flared]	1/4	
Total Piping Length	164	

---

**Refrigerant**


Refrigerant Type	R454B	
Pre-charged Refrigerant Amount	70.5	

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) (\* Windscreens required for cooling operations below 23°F (-5°C))


- <sup>1</sup> Cooling (Indoor // Outdoor) 80°F (26.6°C) DB, 67°F (19.4°C) WB // 95°F (35°C) DB, 75°F (23.9°C) WB
- <sup>2</sup> Heating at 47°F (8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 47°F (8.3°C) DB, 43°F (6.1°C) WB
- <sup>3</sup> Heating at 17°F (-8.3°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 17°F (-8.3°C) DB, 15°F (-9.4°C) WB
- <sup>t</sup> Heating at 5°F (-15°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // 5°F (-15°C) DB, 4°F (-15.6°C) WB
- <sup>u</sup> Heating at -4°F (-20°C) (Indoor // Outdoor) 70°F (21.1°C) DB, 60°F (15.6°C) WB // -4°F (-20°C) DB, -15°F (-26.1°C) WB

MXZ-2D20NL



Unit: inch (mm)

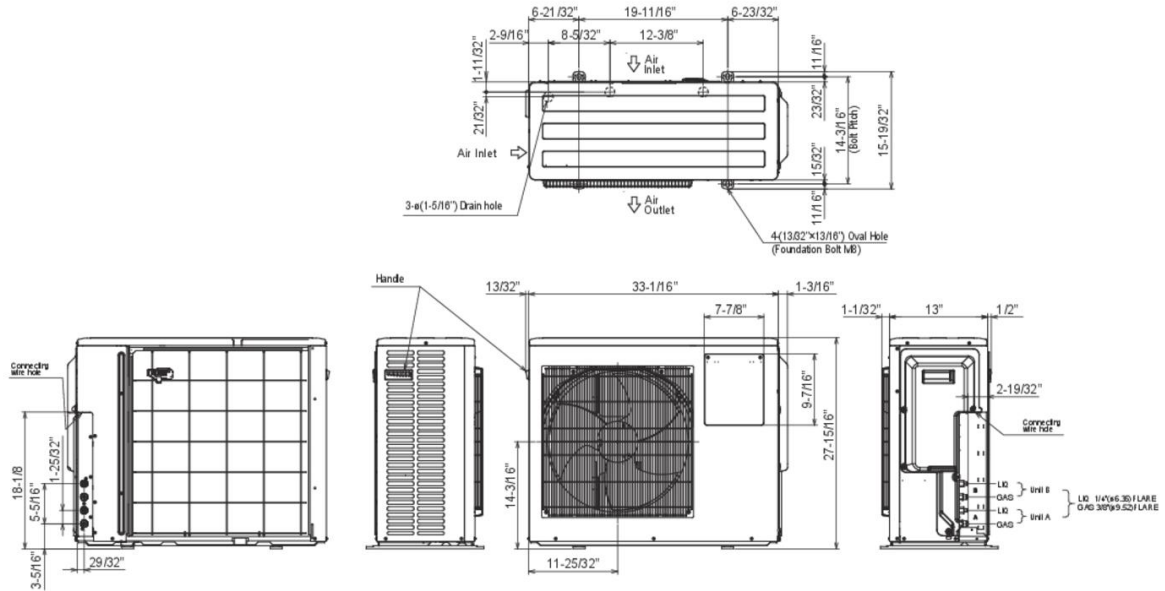

1.FREE SPACE



2.SERVICE SPACE

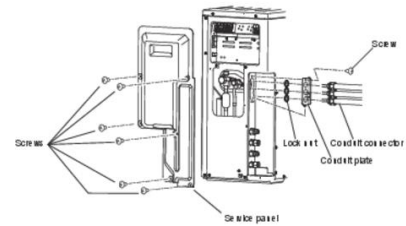

**MXZ-D P-Series Compatibility: P-Series**

P-Series	2 X 2 Cassette	PLA-AE24NL								
P-Series	2 X 2 Cassette	PLA-AE30NL								
P-Series	2 X 2 Cassette	PLA-AE36NL								
P-Series	2 X 2 Cassette	PLA-AE42NL								
P-Series	Ceiling Suspended	PCA-AK24NL								
P-Series	Ceiling Suspended	PCA-AK30NL								
P-Series	Ceiling Suspended	PCA-AK36NL								
P-Series	Ceiling Suspended	PCA-AK42NL								
P-Series	Multi-Position	PEAD-AA09NL	*2,3	*2,3	*2,3	*2,3	*2,3	*2,3	*2,3	*2,3
P-Series	Multi-Position	PEAD-AA12NL	*2,3	*2,3	*2,3	*2,3	*2,3	*2,3	*2,3	*2,3
P-Series	Multi-Position	PEAD-AA15NL		*2,3	*2,3	*2,3	*2,3		*2,3	*2,3
P-Series	Multi-Position	PEAD-AA18NL		*2,3	*2,3	*2,3	*2,3		*2,3	*2,3
P-Series	Multi-Position	PEAD-AA24NL			*2,3	*2,3	*2,3			*2,3
P-Series	Multi-Position	PEAD-AA30NL								
P-Series	Multi-Position	PEAD-AA36NL								
P-Series	Multi-Position	PEAD-AA42NL								
P-Series	Hybrid A-Coil	PAA-AA18NL		*	*	*	*		*	*
P-Series	Hybrid A-Coil	PAA-BA18NL		*	*	*	*		*	*
P-Series	Hybrid A-Coil	PAA-AA24NL			*	*	*			*
P-Series	Hybrid A-Coil	PAA-BA24NL			*	*	*			*
P-Series	Hybrid A-Coil	PAA-AA30NL				*	*			*
P-Series	Hybrid A-Coil	PAA-BA30NL								
P-Series	Hybrid A-Coil	PAA-BA36NL								
P-Series	Hybrid A-Coil	PAA-CA36NL								
P-Series	Hybrid A-Coil	PAA-BA42NL								
P-Series	Hybrid A-Coil	PAA-CA42NL								

\*1 - Up to maximum of two SVZ / PAA indoor units can be connected

\*2 - SVZ / PAA and PEAD cannot be connected in the same system

**MXZ-D M-Series Compatibility: M-Series**

M-Series	Wall Mount	MSZ-FX06NL	*	*	*	*	*	*	*	*
M-Series	Wall Mount	MSZ-FX09NL	*	*	*	*	*	*	*	*
M-Series	Wall Mount	MSZ-FX12NL	*	*	*	*	*	*	*	*
M-Series	Wall Mount	MSZ-FX15NL	*	*	*	*	*	*	*	*
M-Series	Wall Mount	MSZ-FX18NL	*	*	*	*	*	*	*	*
M-Series	Wall Mount	MSZ-FX24NL								
M-Series	Wall Mount	MSZ-GX06NL	*	*	*	*	*	*	*	*
M-Series	Wall Mount	MSZ-GX09NL	*	*	*	*	*	*	*	*
M-Series	Wall Mount	MSZ-GX12NL	*	*	*	*	*	*	*	*
M-Series	Wall Mount	MSZ-GX15NL	*	*	*	*	*	*	*	*
M-Series	Wall Mount	MSZ-GX18NL	*	*	*	*	*	*	*	*
M-Series	Wall Mount	MSZ-GX24NL			*	*	*			*
M-Series	Wall Mount	MSZ-GX30NL								
M-Series	Wall Mount	MSZ-GX36NL								
M-Series	Floor Standing	MFZ-KX09NL	*	*	*	*	*	*	*	*
M-Series	Floor Standing	MFZ-KX12NL	*	*	*	*	*	*	*	*
M-Series	Floor Standing	MFZ-KX15NL	*	*	*	*	*	*	*	*
M-Series	Floor Standing	MFZ-KX18NL	*	*	*	*	*	*	*	*
M-Series	1 Way Cassette	MLZ-KX06NL	*	*	*	*	*	*	*	*
M-Series	1 Way Cassette	MLZ-KX09NL	*	*	*	*	*	*	*	*
M-Series	1 Way Cassette	MLZ-KX12NL	*	*	*	*	*	*	*	*
M-Series	1 Way Cassette	MLZ-KX18NL	*	*	*	*	*	*	*	*
M-Series	2 X 2 Cassette	SLZ-AF09NL	*	*	*	*	*	*	*	*
M-Series	2 X 2 Cassette	SLZ-AF12NL	*	*	*	*	*	*	*	*
M-Series	2 X 2 Cassette	SLZ-AF15NL	*	*	*	*	*	*	*	*
M-Series	2 X 2 Cassette	SLZ-AF18NL	*	*	*	*	*	*	*	*
M-Series	Ceiling Concealed	SEZ-AD09NL	*	*	*	*	*	*	*	*
M-Series	Ceiling Concealed	SEZ-AD12NL	*	*	*	*	*	*	*	*
M-Series	Ceiling Concealed	SEZ-AD15NL	*	*	*	*	*	*	*	*
M-Series	Ceiling Concealed	SEZ-AD18NL	*	*	*	*	*	*	*	*
M-Series	Multi-Position	SVZ-AP12NL	*2,4	*1,2	*1,2	*1,2	*1,2	*1,2	*1,2	*1,2
M-Series	Multi-Position	SVZ-AP18NL		*1,2	*1,2	*1,2	*1,2		*1,2	*1,2
M-Series	Multi-Position	SVZ-AP24NL			*1,2	*1,2	*1,2			*1,2
M-Series	Multi-Position	SVZ-AP30NL								

